


Кабель программирования дисплея MobileRayPro

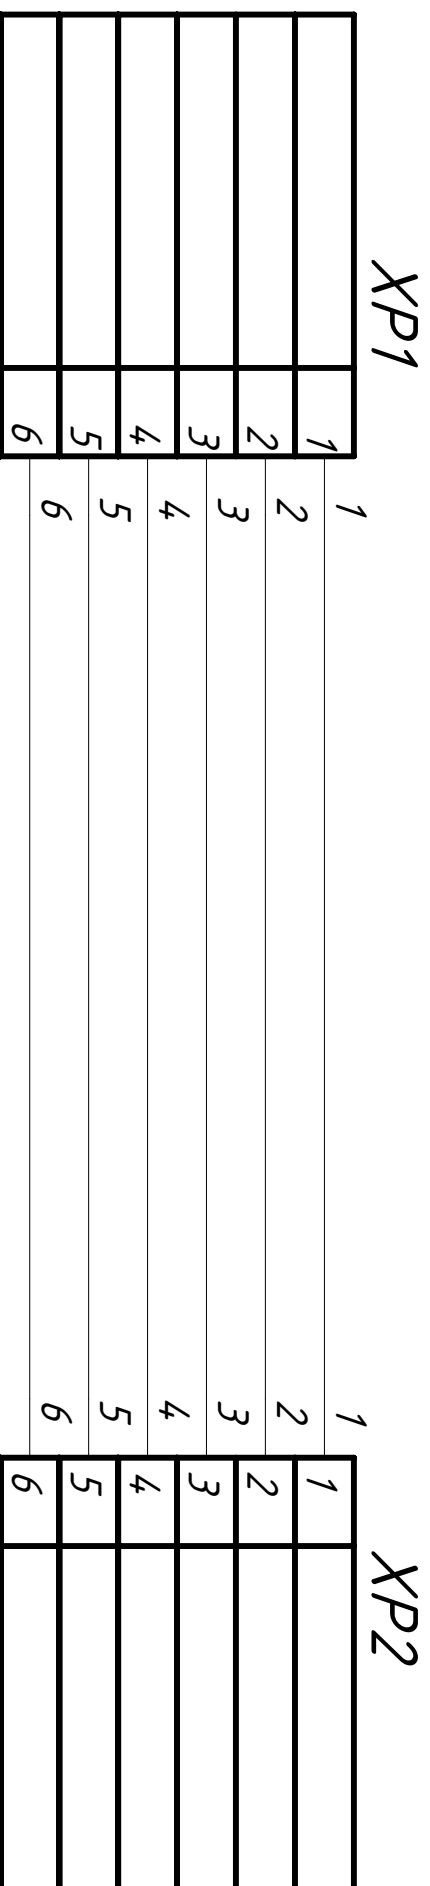

51021-0600

Длина провода 150 мм

PBD-6

контакты для разъема Molex 51021-0600 Molex 50079-8000
программируемые Fuses:

1. Watch-dog Timer always on; [WDTON=0]
2. Preserve EEPROM memory through the Chip Erase cycle; [EESA VE=0]
3. Boot Flash section size=128 words Boot start address=\$0F80; [BOOTSZ=11]
4. Brown-out detection level at VCC=4.0V; [BODLEVEL=0]
5. Brown-out detection enabled; [BODEN=0]
6. Int. RC Osc. 8 MHz; Start-up time: 6 CK + 64 ms; [CKSEL=0100 SUT=10]